

Addressable Manual Call Point

(ZT-CP1/AD, ZT-CP2/AD)




The ZT-CP2/AD is an addressable manual call point which has been engineered to comply with EN54 part 11.

It is a resettable call point that signals an alarm with a yellow flag entering the window area and a red alarm LED illuminating. The modern housing is supplied with a back box which has plenty of room for fitting the cables and also includes 2 x 20mm knockouts for glanded cable entry.

There are 2 versions available;

- ✓ **ZT-CP1/AD** which does not have the Perspex protective cover
- ✓ **ZT-CP2/AD** which has the protective Perspex cover in addition to a “snaplatch” catch that must to be broken off before the call point cover can be lifted (this acts as a deterrent to malicious activations and allows double action activation)

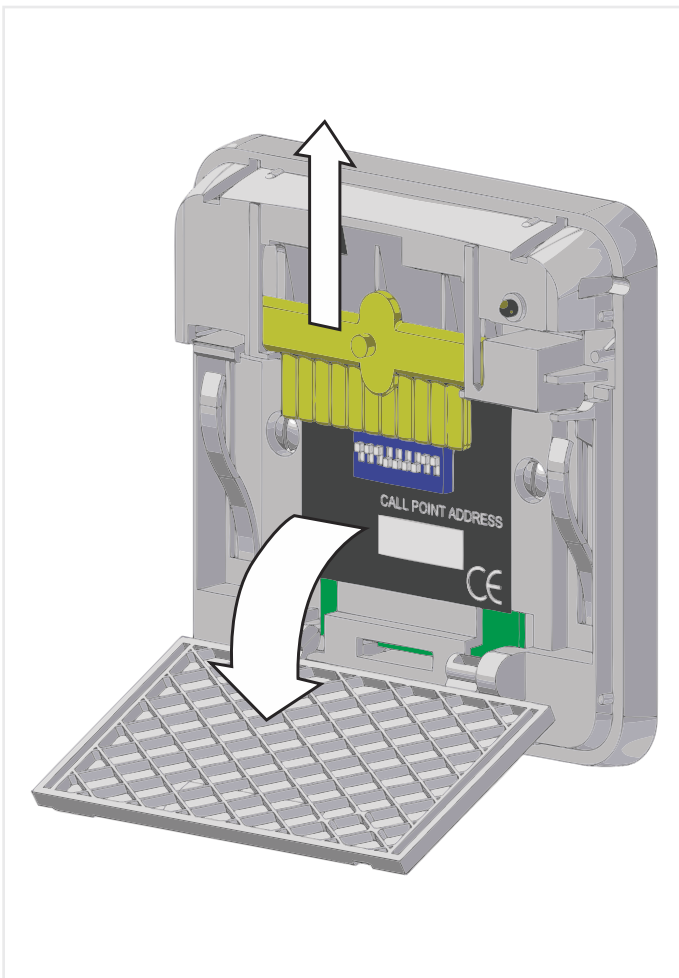

Features

- ✓ Addressable manual call point
- ✓ Complies fully to EN54 part 11
- ✓ Available with or without Perspex protective cover

Model	ZT-CP2/AD	ZT-CP1/AD
Part No.	43-305	43-306
Input Voltage	17-33V DC	
Element Type	Resettable	
Quiescent Current	1.5 mA	
Alarm Current	18 mA	
Alarm Activation	Break Snaplatch	Press Element
	Lift Perspex Press Element	
Operating Temperature	-20° C to 50° C	
Maximum Humidity	95% RH N/C	
IP Rating	IP 43	
Size (WxHxD mm)	111 x 100 x 67	105 x 100 x 58
Weight	198 g	175 g