

2-Way Combined Master Panel

Features

- ▶ Disabled Refuge Combined Master Panel
- ▶ 2x Call/answer outstation inputs
- ▶ Toilet alarm functionality
- ▶ Simple, handset operation
- ▶ Alarm indicators and internal buzzer
- ▶ Power on and system fault indicators
- ▶ Lamp test and silence buzzer push button
- ▶ Straightforward 2 wire installation
- ▶ Etched text front panel
- ▶ Stainless steel fascia, galvanised steel back box



Description


The K41102SST combined master panel provides inputs for Safe-Point call/answer outstations. Using the integrated handset, the master panel can call out to the disabled refuge outstations and once connected allow a duplex voice conversation to take place.

Accompanying LED indicators and an internal buzzer notify of any disabled refuge alarms raised. A fascia located momentary push-button provides lamp-test and buzzer silence functionality. Added LED's provide power health and system fault indications.

Disabled refuge outstations are connected directly to the unit using 2 core 1.5mm enhanced fire rated cable (not supplied). A Toilet alarm kit can be wired directly or in-line with an accompanying disabled refuge call/answer points.

Space for 3.2Ah batteries is provided within the cabinet, these will provide 24 + 3 hours standby as specified by BS5839 Part 9. The unit is available in a surface mount enclosure, comprising a mild steel back box with stainless steel fascia plate.

Typical Installation Scenario

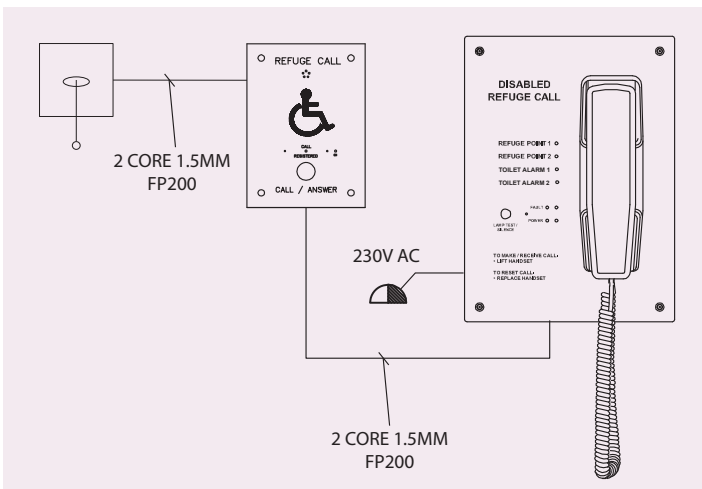

2-Way Disabled Refuge Master Panel

Product Code	Enclosure Type	Enclosure Material /finish	Connectivity
K41102SST	Surface	Stainless steel fascia, mild steel back box/ brushed, EPC black	Radial

Specifications

Dimensions (mm)	Enclosure: 229 (W) x 312 (H) x 90 (D)
Weight	3Kg