


9050 Alphanumeric Pager

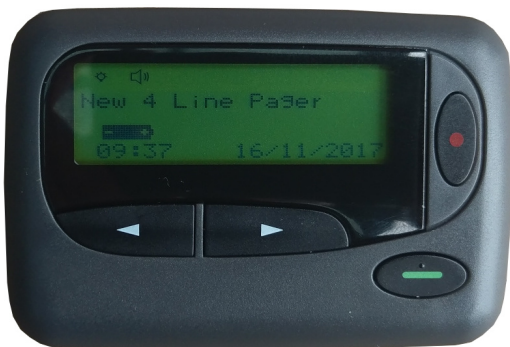

Key Features:

- Easy to use
- Hand programmable
- Lock down features in programming software
- Selectable alerts – silent, vibrate, various tones and music
- Out of range indicator
- Priority override
- Over the air (OTA) programmable
- Duplicate message rejection
- Low battery warning
- Unread message reminder
- Time, date and alarms, message time stamps

Specifications:

Frequency	VHF 138-143, 143-151, 151-159, 159-167, 167-174 MHz UHF 448-452, 452-456, 456-460, 460-464, 464-468, 468-472 MHz
Signal Format	POCSAG 512 or 1200bps
Cap Codes	8
Message Capacity	19 messages up to 512 characters each
LCD Display	4 lines x 20 characters or zoom to 2 lines x 20 characters
LCD Backlight	White LED
Channel Spacing	25KHz Wide Band (± 4.5 KHz deviation)
Receive Sensitivity	512bps 5uV/m, 1200 bps 7uV/m
Battery	1 x AAA Alkaline
Dimensions	80mm (L) x 54mm (W) x 19mm (H)
Weight	68g with battery
Battery life	Up to 80 days using alkaline battery
Approvals	CE, FCC, RCM, RoHS

*Specifications subject to change without notice