


# Analogue Addressable Manual Call Point with Short-Circuit Isolator

## HCP-E(SCI)

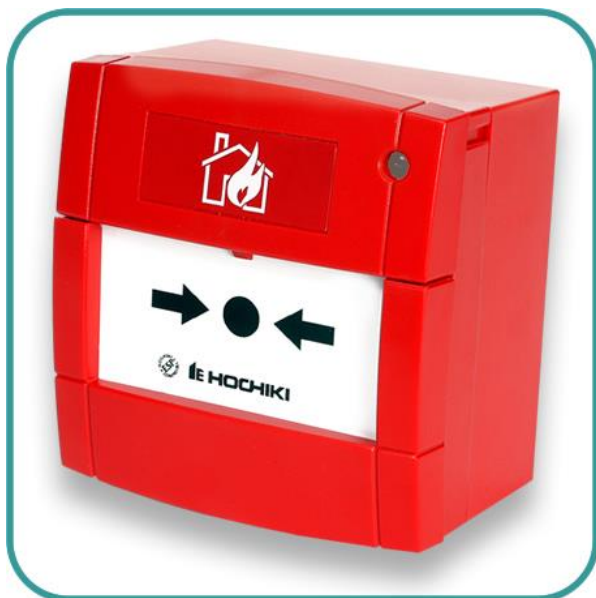

### Features

- ▶ Fast response
- ▶ Integral short-circuit isolator
- ▶ Bi-coloured status LED
- ▶ Non-frangible element fitted as standard (conforms to EN54)
- ▶ Addressed with TCH-B100 Hand Held Programmer
- ▶ Surface or flush mounting (if surface mounting, requires SR MOUNTING BOX – sold separately)
- ▶ Different colour options available
- ▶ LPCB Approved to EN54
- ▶ SIL Level 2 approved variants available

### Description

Model HCP-E(SCI) is a Manual Call Point with integral short-circuit isolator, which is fully compatible with Hochiki's ESP analogue addressable protocol. The unit incorporates a bi-coloured LED, which can be selected as pulsing/non-pulsing<sup>\*1</sup> for communications polling and is continuously lit when the HCP-E(SCI) is operated – in these two states the LED will show red. The LED will show amber when a short-circuit is present but will switch to red if the unit is activated. The unit operates by pressing the EN54 compliant non-frangible (plastic) element and produces a high level ESP interrupt. A built in test function initiated by the control panel ensures the integrity of the device at all times and the device can be tested by insertion of a test key in the underside of the unit. Two terminal blocks are provided for easy connection to the loop wiring.

The unit is addressed using the TCH-B100 Hand Held Programmer for quick and reliable addressing. The unit can be flush mounted as supplied. For surface fixing a suitable back box such as the SR MOUNTING BOX is required (sold separately). An optional glass element is also available.

Specification	
Ordering Code	HCP-E(SCI)
Back Box Ordering Code	SR MOUNTING BOX (required for surface fixing – <b>sold separately</b> )
Operating Voltage	17 – 41 VDC
Low Power Mode	180 $\mu$ A (max), 100 $\mu$ A (typ)
Quiescent Current	350 $\mu$ A (max), 250 $\mu$ A (typ)
Alarm Current	10.0 mA (max), 5 mA (typ)
Resistance in positive	100 m $\Omega$ when closed (max), 100 k $\Omega$ when open (min)
Short-circuit threshold (typ)	430 $\Omega$
Transmission Method	Digital Communication Using ESP
Operating Temperature Range	-10 $^{\circ}$ C to + 50 $^{\circ}$ C
Storage Temperature Range	-30 $^{\circ}$ C to + 70 $^{\circ}$ C
Maximum Humidity	95%RH - Non Condensing (at 40 $^{\circ}$ C)
Ingress Protection Rating	IP24
Colour / Case Material	Red / Modified Polyphenylene Oxide
Weight (g) / Dimensions (mm)	(Flush Unit) 110 / W89 x H93 x D27.5
	(With Surface Mount Back Box) 161 / W89 x H93 x D59.5

<sup>\*1</sup> Fire alarm control panel compatibility is required for this feature.