

TS.4204

CONTRACT RANGE Door Closer



#DesignerDoorCloserthatLast



Silver (SE)

Satin Nickel Plate (SNP)

Polished Nickel Plate (PNP)

Electro Brass (PVD)

Product Overview

- ✓ Engineered from exceptional high quality components
- ✓ Variable power adjustment from power size EN2-4
- ✓ High-quality finishes (SE, SNP, PVD, PNP only)
- ✓ Back Check and Delayed Action features are as standard on this model
- ✓ All our certification and product testing is done by UKAS approved Third-Party test bodies
- ✓ Easy to read instructions, saving over 12 minutes of fitting time



1942

Specification Overview



Fire Tested
up to 120mins



Max Door
Weight 80kg



Opening Angle
180°



Max Door Width
1100mm



Adjustable
Closing Speed



Guarantee



Universal
Application



Power Size
EN2-4



Adjustable
Delayed Action



Back Check




TS4204-
CPR-44-0316-17-04



Rut Lock

Cover

All dimensions shown are in mm.

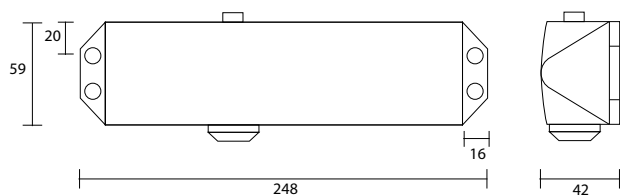

Technical Information

BS EN 1154 Classification

TS.4204 door closers have been independently tested to conform with the EN 1154 performance standard. They are CE marked and classified as follows:

Standard Arm Fig 1.

4	8	4 2	1	1	3
---	---	--------	---	---	---

BS EN 1634 Fire Test

TS.4204 closers have been tested to EN 1634 for 30, 60 and 120 minute door sets. Test certificates are available on request.

Options

- Hold-Open arm (Not to be used on fire doors)
- Drop plate

Options not covered by CE.

Other Benefits

- Painted and Plated finishes

Description	EN Size	Finish	Re-order Code	Product Code	Box Qty
 <p>TS.4204 Combined unit closer, flat bar armset, cover, PA bracket with DELAYED ACTION & BACK CHECK</p>	2/3/4	Silver	12109	TS.4204DABC.SLFB.SESE	8
	2/3/4	Satin Nickel	12110	TS.4204DABC.SLFB.SNPSNP	8
	2/3/4	Polished Nickel	12111	TS.4204DABC.SLFB.PNPPNP	8
	2/3/4	Electro Brass	12112	TS.4204DABC.SLFB.PVDPVD	8