

Reset Call Point & Waterproof Reset Call Point

(ZT-CP3, ZT-CP3/WP)

ZT-CP3




ZT-CP3/WP

The ZT-CP3 and ZT-CP3/WP call points are unique in that they mimic the feel of breaking glass whilst offering the user the benefits and environmental advantages of a re-settable operating element.

The CP3 uses a simple yet ingenious patented mechanism which consists of a rigid plastic operating element and an over centre spring mechanism. This arrangement provides real action on operation and simulates break glass activation.


An activation indicator drops into view at the top of the window after the CP3 has been operated. The unit is then simply reset with a key and is ready for re-use straight away.

A special Polycarbonate cover (CP3-CV) is available for extra protection against accidental activation and thus allowing the unit to operate as a double action call point. This must be ordered separately.

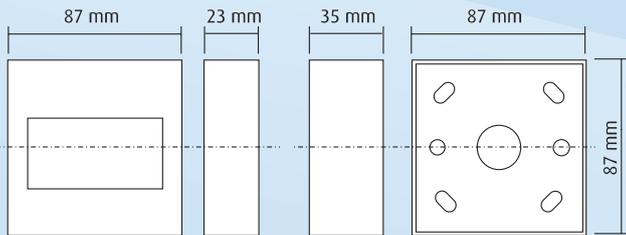

ZT-CP3

Back Box

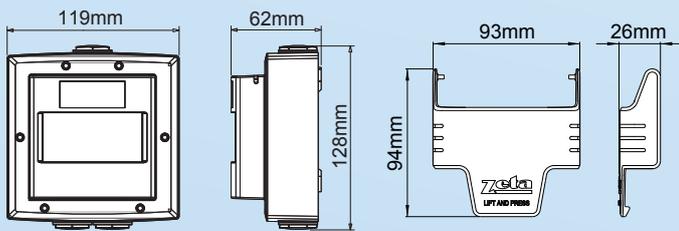

ZT-CP3/WP

CP3-CV

Features

- ✓ EN54-11 approved
- ✓ Waterproof tested to IP67 (ZT-CP3/WP only)
- ✓ Glass appearance maintains operator deterrence
- ✓ Positive activation that mimics the feel of breaking glass
- ✓ Visible warning flag confirms activation
- ✓ Simple key to reset operating element (no broken glass)
- ✓ Complete functional test with every activation

Model	ZT-CP3	ZT-CP3/WP
Current Rating	(All Series) 3 Amps 12 - 24V DC (Series 02-04 & 11) 3 Amps 125 - 250V AC	(Series 01 & 11) 3 Amps 12 - 24V DC (Series 11) 3 Amps 125 - 250V AC
Low Current Rating (All Series)	1-100 mA 5 - 12V DC 0.1 Amps 125 - 250V AC	
Housing and Mounting Box Material	Polycarbonate	
Electrical Contact Material	Silver plated brass	
Operating Temperature	-20 degrees C to +65 degrees C	
Installation Terminal Conductor Size	0.5mm - 2.5mm	
Colours	Red, Yellow, Green, Blue & White	
Mounting	Flush or surface with back box	
IP Rating	IP32	IP67